




# Honeycomb Modular LED

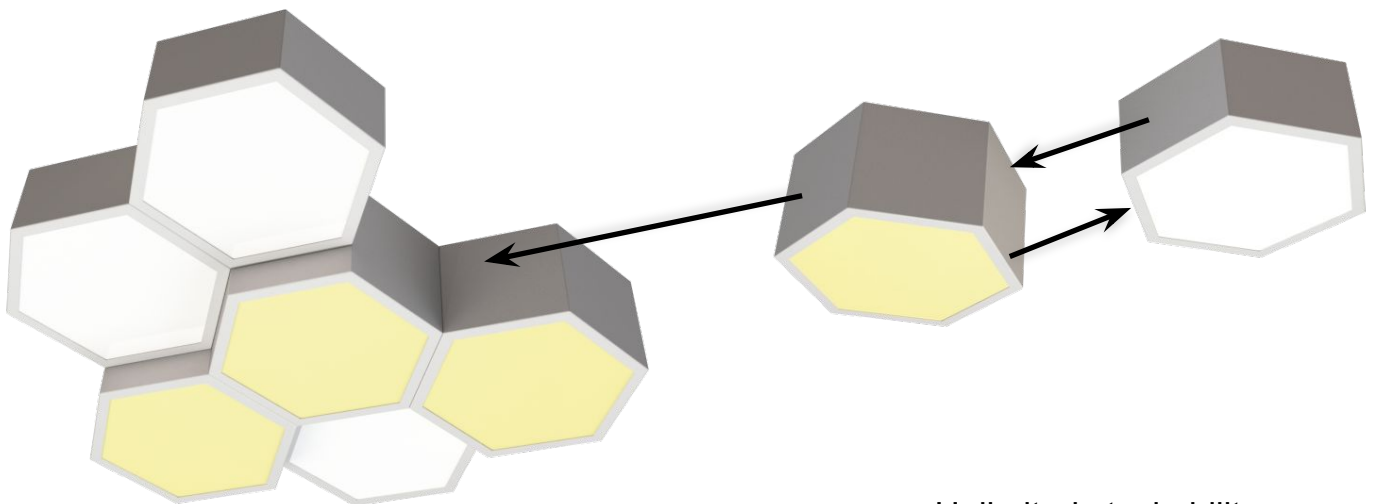

Unlimited stackability

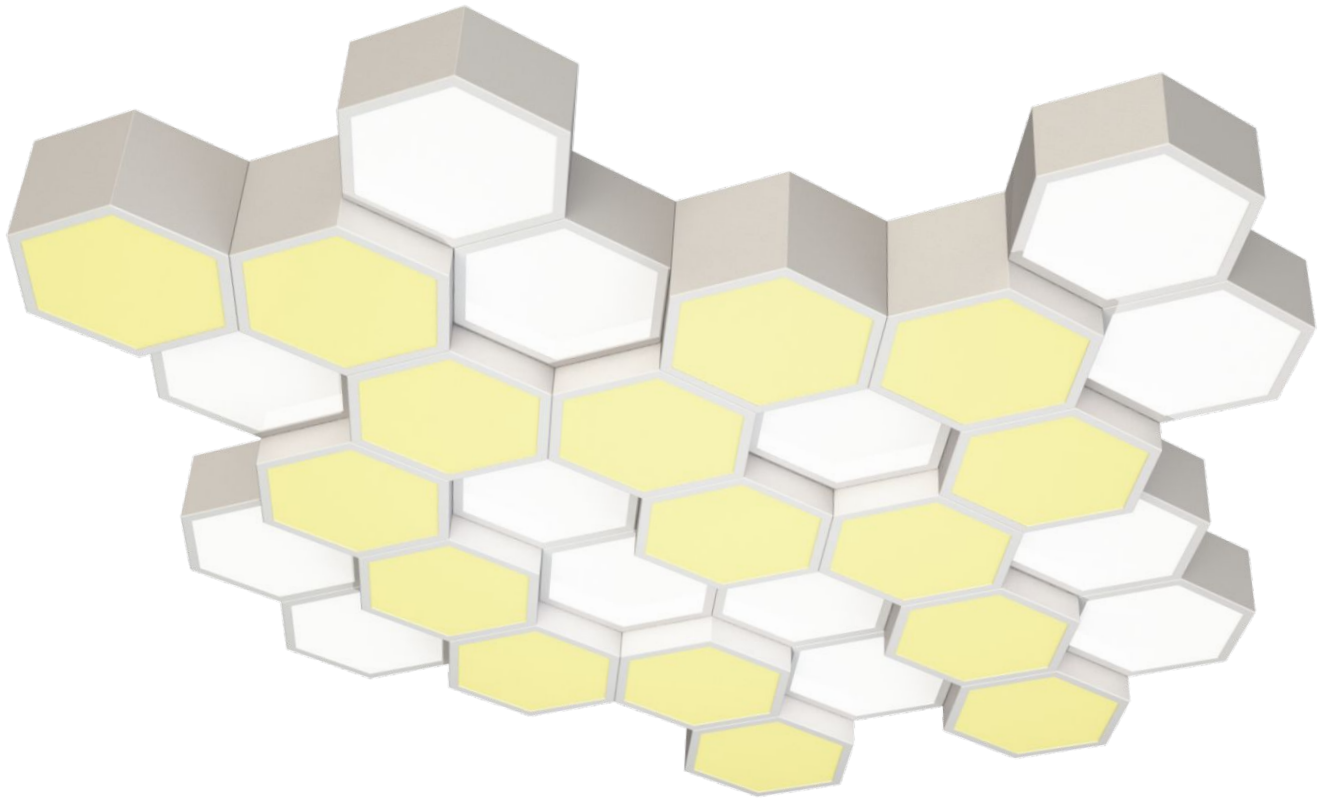




## FACT FILE:




<b><u>General Information</u></b>	
Body Construction	Mild Steel - Powder coated
Lens Type	Polymethyl methacrylate (PMMA)
Recommended Height Installation	From 2m to 6m
Installation type	Can be surface, mounted or suspended.
Installation Data	IES Files - yes.
Compliance	SANS 60598
IP Rating	IP20
Control Type	Integral
<b><u>Electrical Information</u></b>	
Electrical Class	Class 1
Socket Options	N/A
Supply Voltage	230V AC 50Hz
Surge Protection	2kV minimum
Power Factor	Better than 0.94
Dimmable?	Standard: no With correct gear: Dali : Yes 1-10 V : Yes DMX : Yes Wifi or RF
<b><u>Optical Information</u></b>	
CRI	Minimum 80
CCT	3000K , 4000K and 5000K RGBW
<b><u>Performance</u></b>	
Total Circuit load and Lumens	6W - 770 Lumens 15W 1920 Lumens
<b><u>Operating Conditions</u></b>	
Operating Temperature range	-20°C to +45°C
<b><u>Dimensions and Mounting</u></b>	
Weight	1kg per cell




**FACT FILE:**




## Single cell dimensions

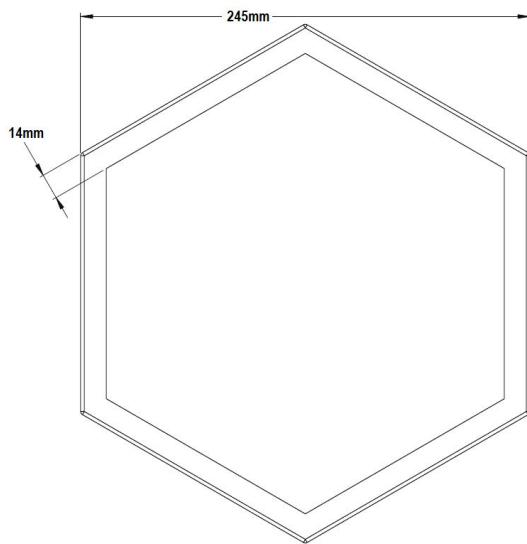

Bottom View

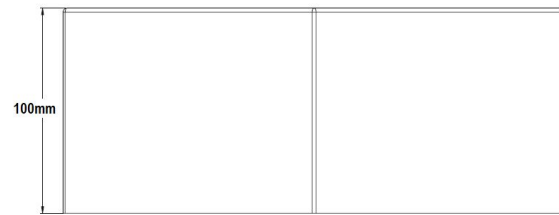

Side View

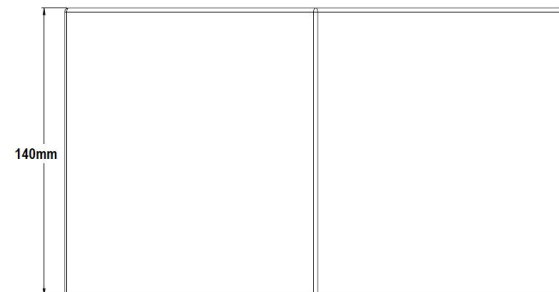

Side View