


Ultra Low Glare Recessed Downlight

Physical Data:

- Body Construction:
Aluminium
- Lens Type:
Plastic
- Control Type:
On / off
DALI
DMX
0 - 10V

Dimensions:

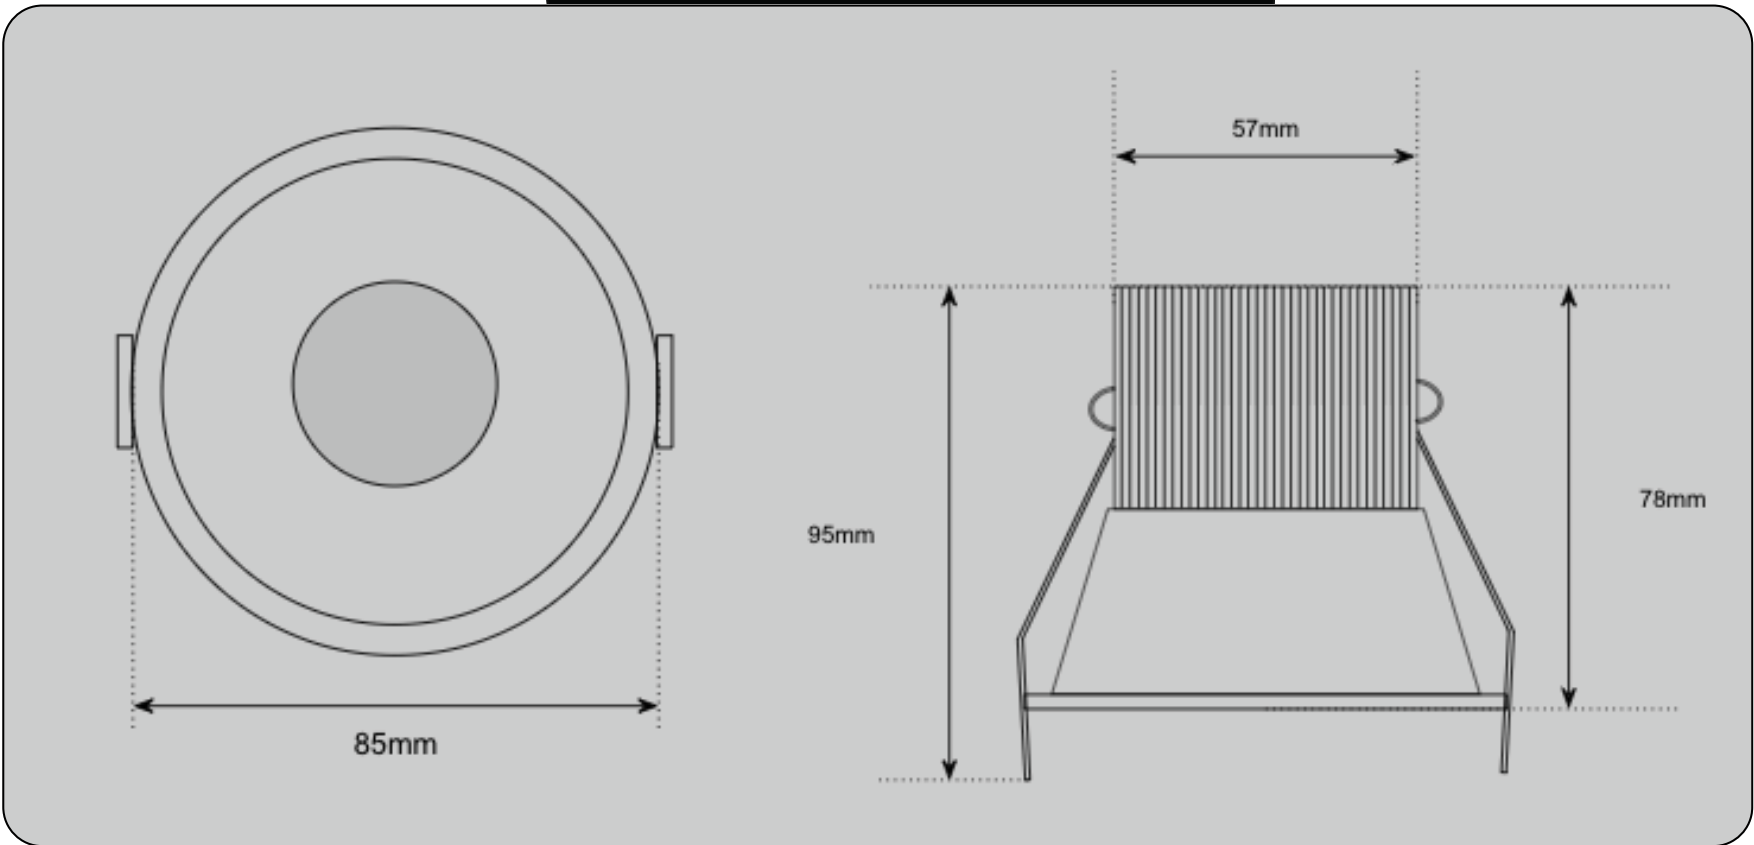

Technical Data:

- Supply Voltage:
230V AC
12 - 24V DC
- Total Circuit Load:
10W
- CCT
3000K, 4000K, 5000K
- CRI
+80
+90 on request
- Beam Angles:
15°, 24°, 38°

Other Information:

- Compliance:
SANS 60598
- IP Rating:
IP 44
- Temperature:
-20°C - +50°C
- Weight
200g
- Surge Protection:
Dependant on power supply unit.

