




RF RGBWW floodlight



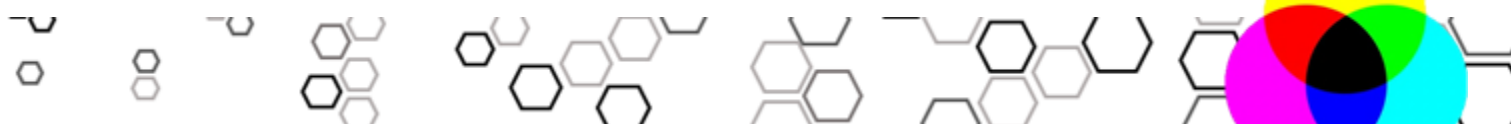

FACT FILE:

<u>General Information</u>	
Body Construction	Aluminium powder coated
Lens Type	Toughened glass
Application	General purpose floodlighting, or accent lighting, tree or column uplighting
Compliance	SANS 60598
IP Rating	IP 65
Control Type	RGBWW – selectable via RF remote Fully dimmable via remote – in all modes
<u>Electrical Information</u>	
Electrical Class	Class 1
Socket Options	Supplied with 2m Trailing cable and 15A Plugtop Other options on request
Supply Voltage	230V AC 50 hz
Surge Protection	2KV
Power Factor	Better than 0,94
<u>Optical Information</u>	
Lumens – when white activated	1200 lumens
Beam angle	25 degrees
CRI	When in white mode better than 85
CCT	2400K to 6500K selectable between as well. RGBW – with various modes
<u>Performance</u>	
Wattage	12W maximum
<u>Operating Conditions</u>	
Operating Temperature range	-20 to + 45C
<u>Dimensions and Mounting</u>	
Weight	1,5kg



FACT FILE:

138mm

120mm

