




LED Fibre Optic Light Engines

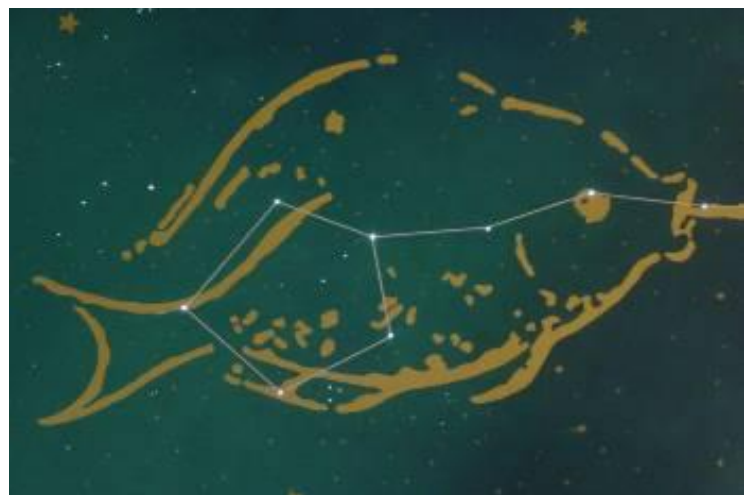





FACT FILE:

<u>General Information</u>	
Body Construction	Mild Steel - Powder Coated
Port	Turned Aluminium
Force Cooled	Not required
Recommended Height Installation	N/A
Compliance	SANS 60598
IP Rating	IP20
Control Type	Internal power supply
<u>Electrical Information</u>	
Electrical Class	Class 1
Socket Options	N/A
Supply Voltage	230V AC
Surge Protection	Dependent on internal power supply
Power Factor	Better than 0.94
<u>Optical Information</u>	
LED Colour Temperature	Neutral White
CRI and CCT	+85, 4000K
<u>Performance</u>	
Total Circuit load and Lumens	3W LED - 250 lumen
Operating options	Single colour / twinkling wheel Multiple colour wheel - with 4 colour options on rotating wheel. DMX addressable option available.
Installation Data	Available
Other Options	Twinkling wheel also available.
<u>Operating Conditions</u>	
Operating Temperature range	-20°C to +45°C
<u>Dimensions and Mounting</u>	
Weight	1kg



FACT FILE:

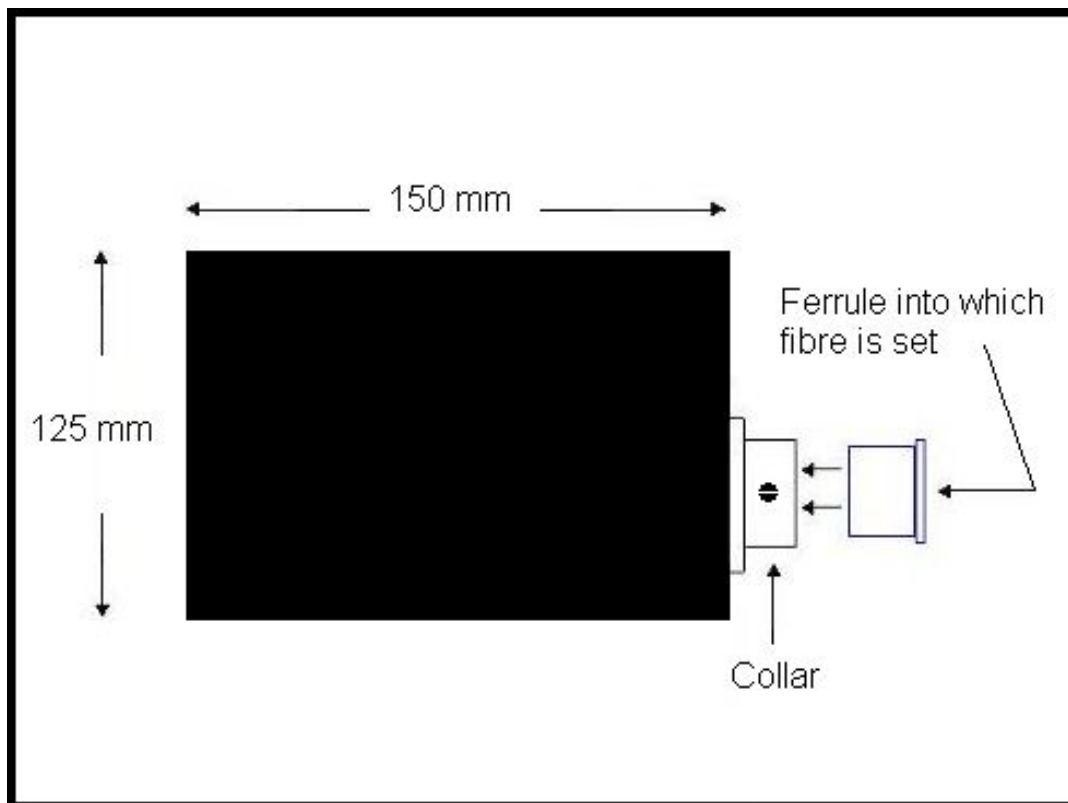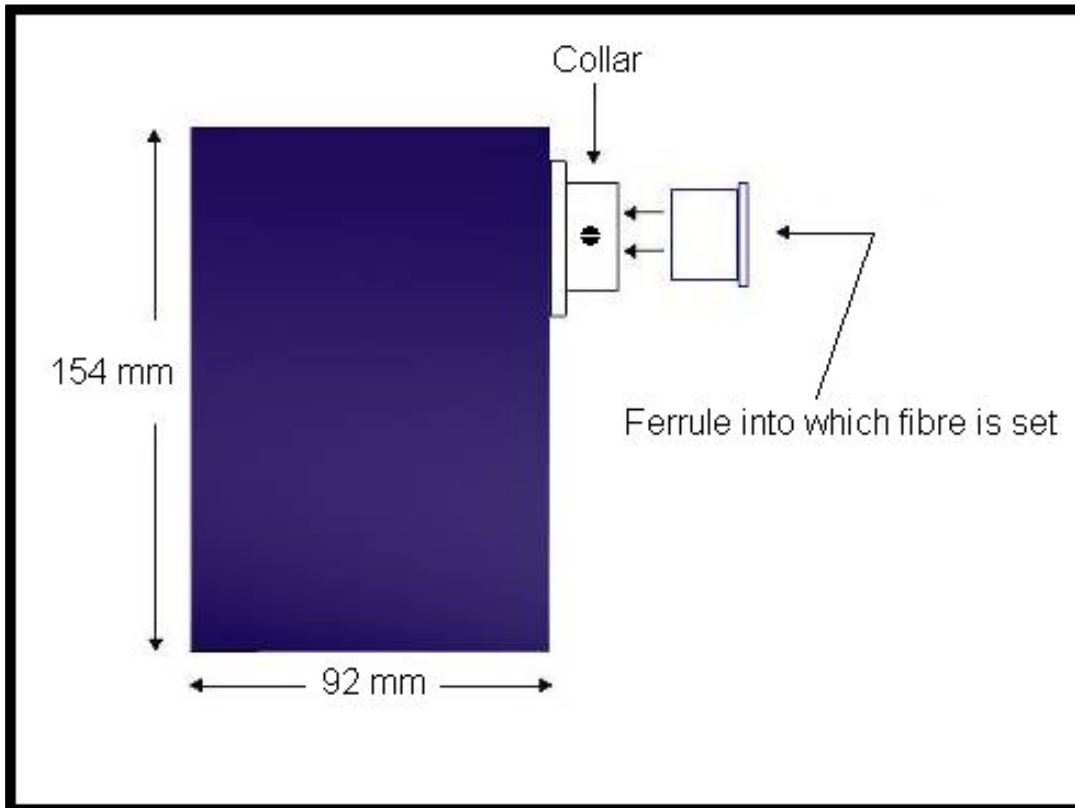

Lumen values are as measured at source - on the PCB - not exiting light fitting.
Values are subject to change at any time and without notice.