





## Ghostlight Wash

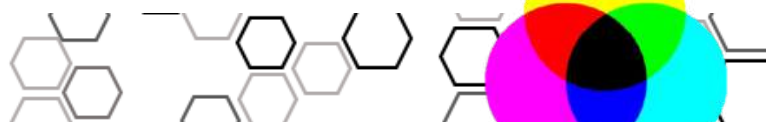


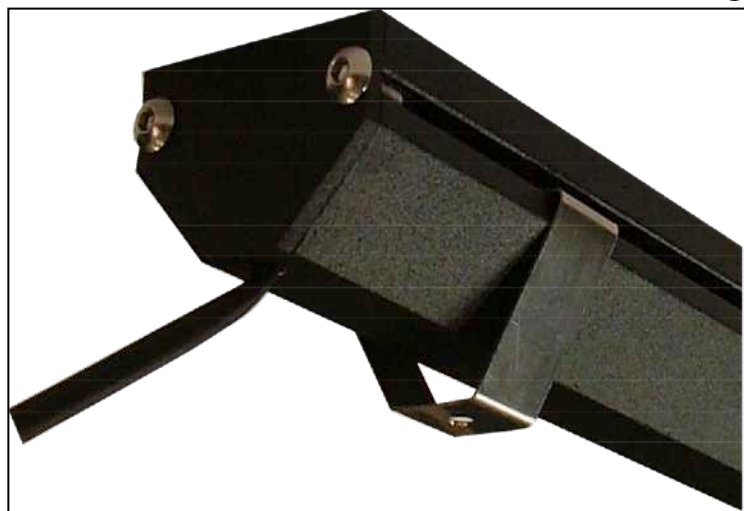

## FACT FILE:




<u>General Information</u>	
Body Construction	Extruded aluminium LM 6 powder coated or anodised
Lens Type	PMMA - Acrylic - either clear or frosted or coloured - guaranteed for 10 years in sunlight
Recommended Height Installation	From 0 to 4m
Compliance	SANS 60598
IP Rating	IP 65 for Ribbon
Control Type	External control gear.
Dimmable	Yes with appropriate dimmer and DMX controls
Lengths	From 100mm to 5000mm and anything in between as long as the cutting increment is 50mm
<u>Electrical Information</u>	
Electrical Class	Class 2
Socket Options	N/A
Supply Voltage	24V DC
Surge Protection	Dependant on what is in External power supply - usually 2kV
Power Factor	Better than 0.95
<u>Optical Information</u>	
CRI	Always above 90 (white only)
CCT	From 2700K to 6500K or RGBW or single colour red or green or blue
<u>Performance</u>	
LED type - white light RGB	10W per m or 20W per m 2700K to 6500K = 1500 lumens per m or 3000 lumens per m, RGBW - up to 30W per m
<u>Operating Conditions</u>	
Operating Temperature range	-20C to +40C
Power Supply	Cannot be fitted within - external power supply needed.
<u>Dimensions and Mounting</u>	
Weight	Less than 1kg per m
Mounting	Surface mount or swivel with smiley bracket

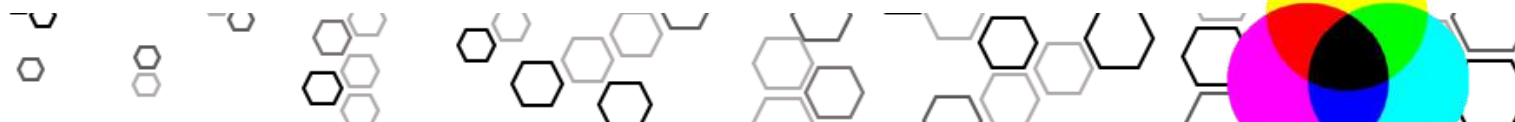



## FACT FILE:

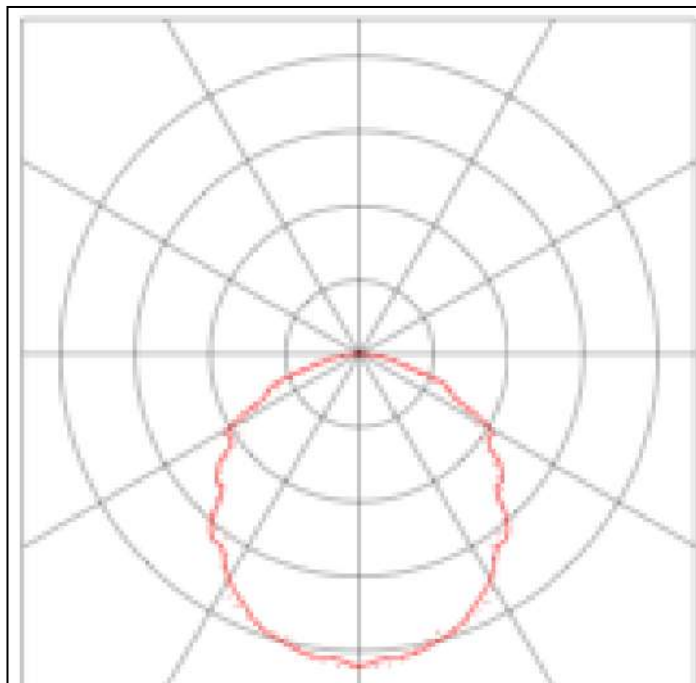


### LED Colour options

Standard LED options are:


1. Warm white 2700K to 6500K CRI better than 94
2. Red, Green, Blue, Amber
3. RGBW - in one, for colour mixing.

### Lens options

1. Standard lens is opal
2. Other options are:
3. Clear - for 25% more light,
4. Or coloured lenses if you want to change light colour without changing the LEDs - It is best to start with soft white 4000K as a base colour

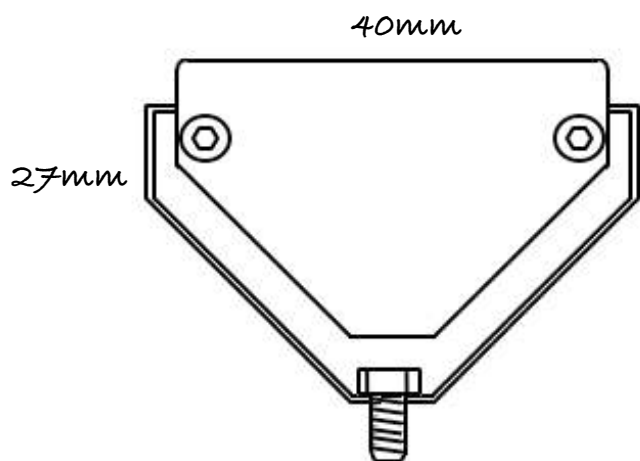

Front view of SS bracket  
for mounting directly  
behind - no swivel

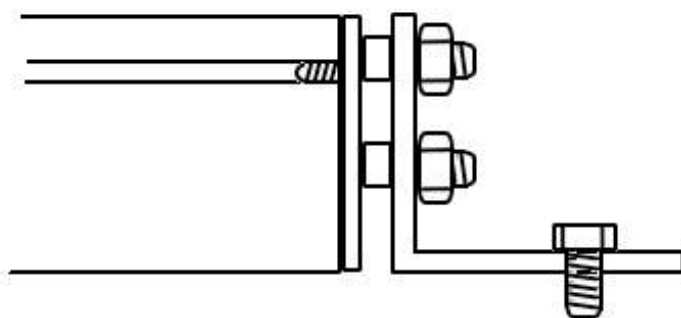

Side view with bolt on  
swivel SS bracket for  
directional aiming of 30  
degrees from vertical/  
horizontal

