





RGBW Eco Cannon

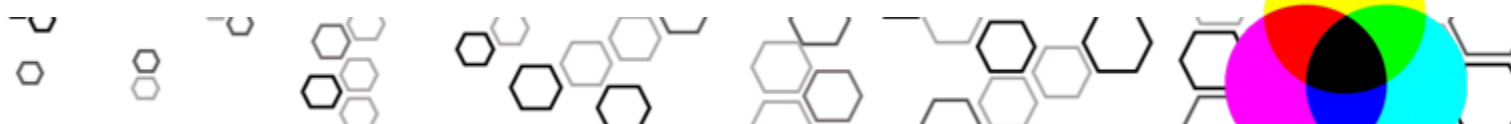

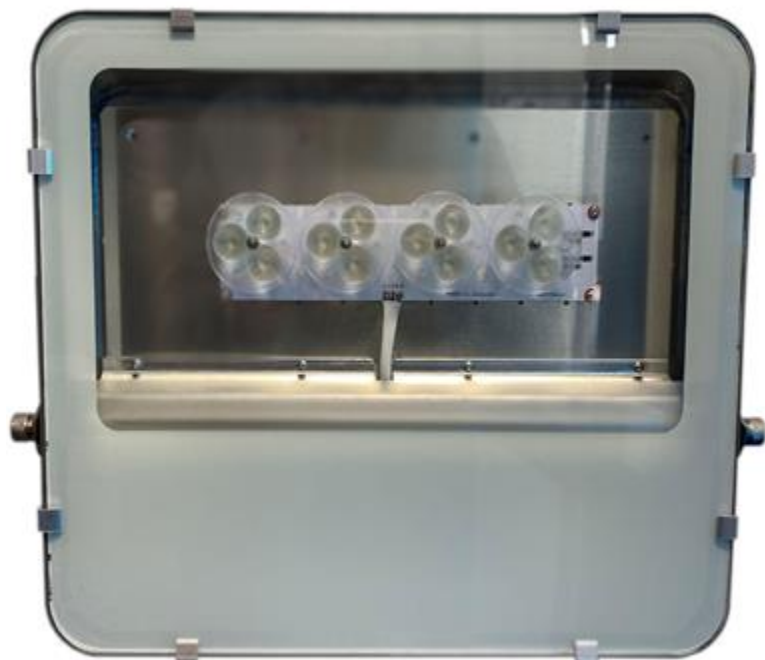

FACT FILE:




<u>General Information</u>	
Body Construction	LM6 Marine grade aluminium/ Yoke and Bulkhead bracket Stainless Steel 304 or 316 or HD galvanised
Lens Type	15°, 30° or 60° polycarbonate optic
Cover Glass	4mm Toughened glass
Recommended Height Installation	N/A
Compliance	SANS 60598
IP Rating	IP 65
Control Type	Internal 2.4MHz RF receiver and power supply DMX or DALI – internal with floating XLR IP plug.
<u>Electrical Information</u>	
Electrical Class	Class 1
Socket Options	N/A
Supply Voltage	230V AC
Surge Protection	Dependent on internal power supply – usually 2kV
Power Factor	Better than 0.94
<u>Optical Information</u>	
CRI	N/A
CCT	N/A
<u>Performance</u>	
Total Circuit load and Lumens	Maximum of 75W for DMX Maximum of 100W for RF (all on max) 25W/colour 2200 Lumens (white only)
<u>Operating Conditions</u>	
Operating Temperature range	-25°C to +45°C
<u>Dimensions and Mounting</u>	
Weight	2kg




FACT FILE:


Front View:

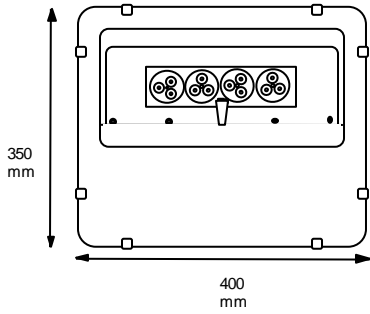


100W

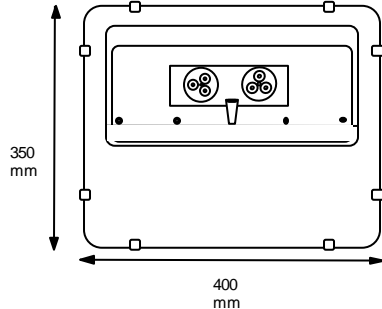


50W

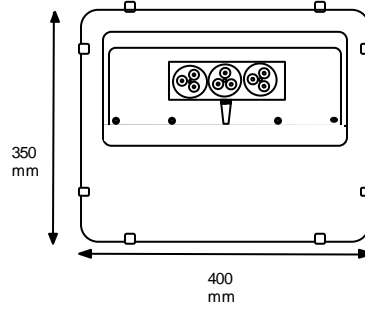

75W

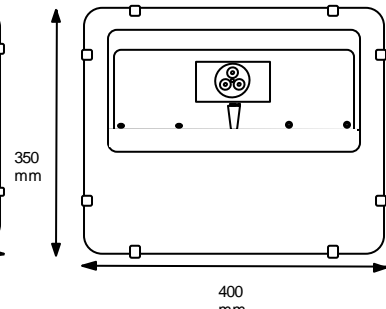

25W

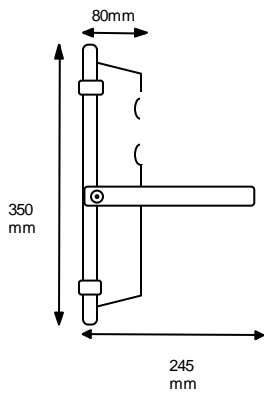

Side View: