




Bollard




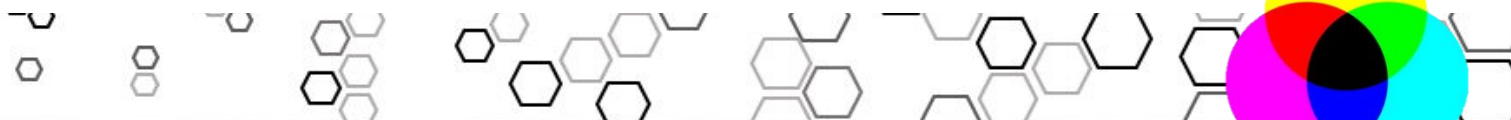


FACT FILE:



<u>General Information</u>	
Body Construction	Glass filled Polypropylene
Lens Type	Clear or frosted acrylic
Recommended Height Installation	600mm or 1000mm
Compliance	SANS 60598
IP Rating	IP 66
Control Type	50 000 hour Tridonic or Helvar or TCI – internally mounted
Dimmable	Standard – no but with correct gear - then; Dali – Yes 1-10V – Yes DMX – Yes Triac -Yes
<u>Electrical Information</u>	
Electrical Class	Class 1
Socket Options	N/A
Supply Voltage	230V AC 50HZ
Surge Protection	2kV minimum
Power Factor	Better than 0.94
<u>Optical Information</u>	
CRI	Always higher than 82
CCT	3000K 4000K and 5000K standard.
<u>Performance</u>	
Total Circuit load and Lumens	12W – 1500 lumens
<u>Operating Conditions</u>	
Operating Temperature range	-20°C up to 40°C
<u>Dimensions and Mounting</u>	
Weight	650g
Installation Data	IES Files – Yes



FACT FILE:

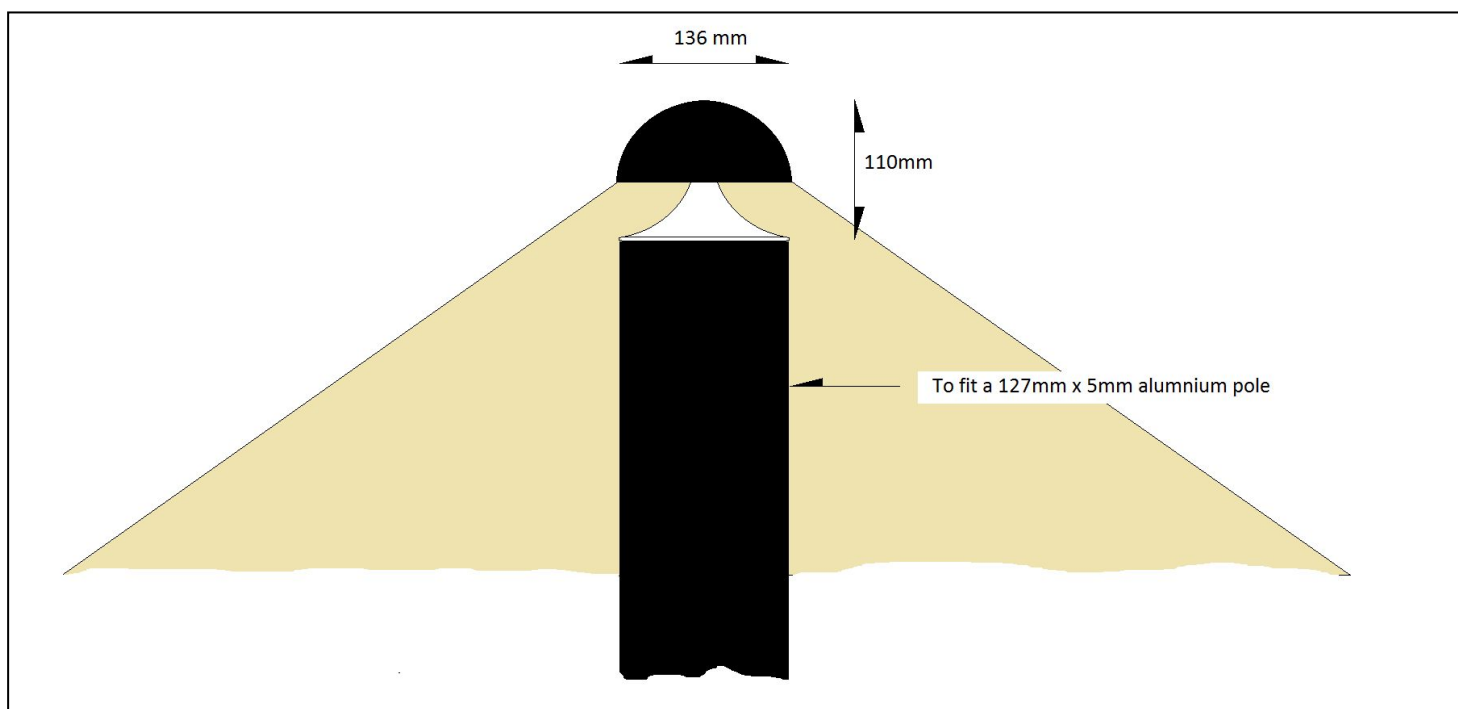

Lumen values are as measured at source - on the PCB - not exiting light fitting. Due to the fast pace of development - values are subject to change at any time and without notice.