



## Surface mount variable zoom and CCT spotlight






## FACT FILE:


	<u>Variable Spot</u>
<b>Body Construction</b>	Aluminium Body
<b>Lens Type</b>	Acrylic
<b>Recommended Height Installation</b>	From 1,8m to 4,5m
<b>Compliance</b>	SANS 60598
<b>IP Rating</b>	IP 20
<b>Control Type</b>	On / Off
<b>Electrical Class</b>	Class 2
<b>Socket Options</b>	Surface mount
<b>Supply Voltage</b>	230V AC
<b>Surge Protection</b>	1,5KV
<b>Power Factor</b>	Better than 0,95
<b>CRI</b>	Better than 0,94
<b>CCT</b>	Selectable on light fixture; 3K or 4K or 6K
<b>Beam angles</b>	15° , 24° , 38° , 60° (Selectable on Light Fixture)
<b>Total Circuit load and Lumens</b>	15W, 1200 lumens exiting the light
<b>Operating Temperature range</b>	-20°C to +40°C
<b>Weight</b>	0.9kg




Variable Spot 15W 15°

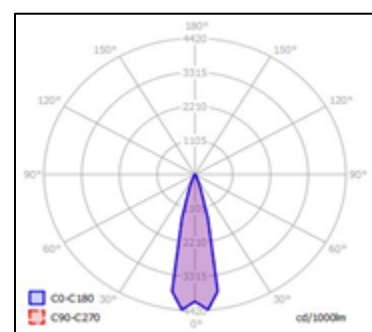

Variable Spot 15W 24°

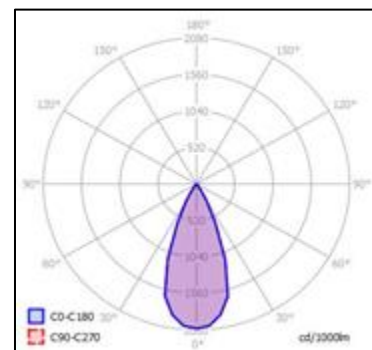

Variable Spot 15W 38°

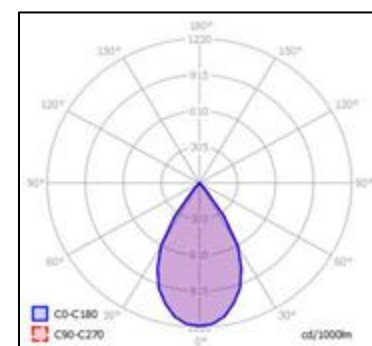

Variable Spot 15W 60°

