


Fixed Spot / Variable Spot / Ambient Light
(Magnetic Mounted Interchangeable Lighting System)



Fixed Spot (30W)

- ☐ No beam angle adjustments
- ☐ No CCT changes

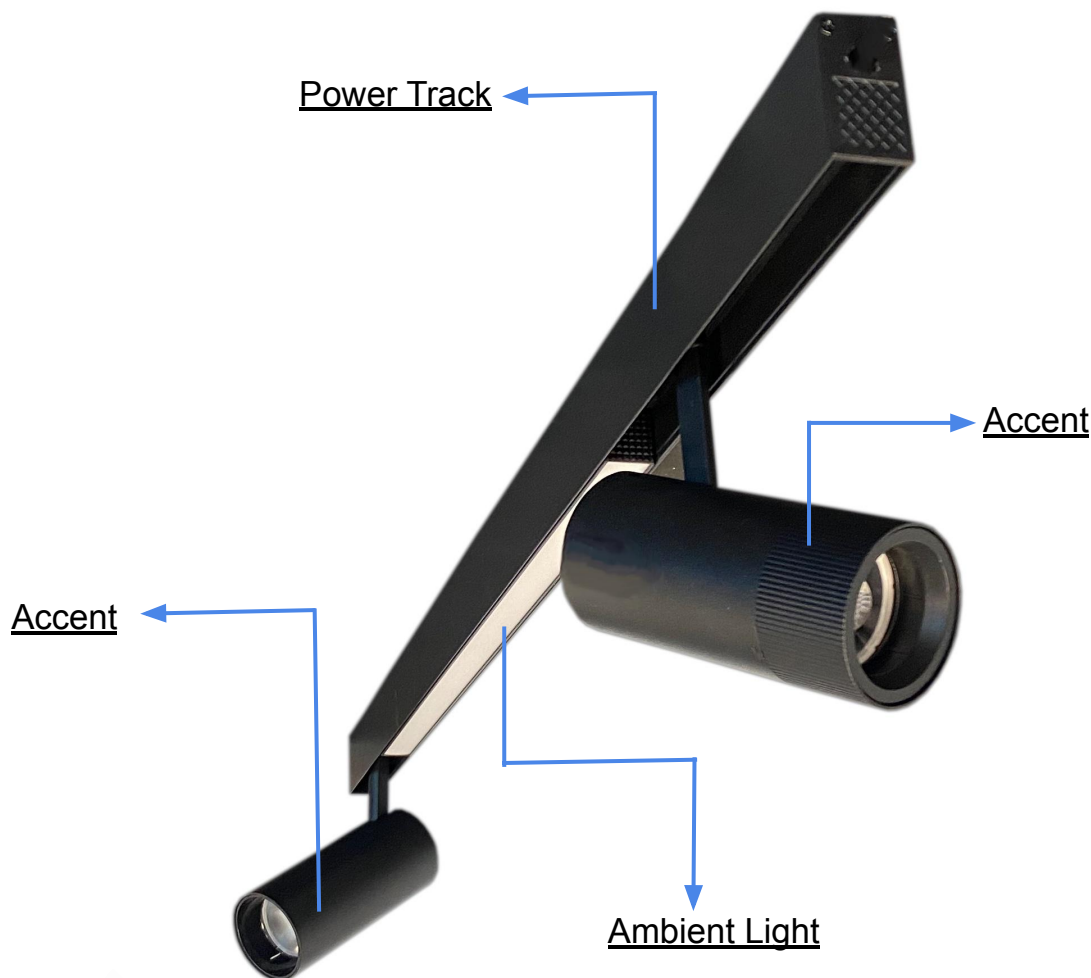

Variable Spot (15W)

Can select between 3K, 4K and 6K


Change beam angles 15°, 24°, 38° and 60° with the rotating lens.

Ambient Light (20W)




Can select between 3K, 4K and 6K






FACT FILE:

	<u>Fixed Spot</u>	<u>Variable Spot</u>	<u>Ambient Light</u>
<u>General Information</u>			
Body Construction	Aluminium Body	Aluminium Body	Extruded Aluminium body with ABS ends and acrylic lens.
Lens Type	Acrylic	Acrylic	Acrylic Opal
Recommended Height Installation	From 1,8m to 4,5m	From 1,8m to 4,5m	From 1,8m to 4m
Compliance	SANS 60598	SANS 60598	SANS 60598
IP Rating	IP 20	IP 20	IP 20
Control Type	On / Off	On / Off	On / Off
<u>Electrical Information</u>			
Electrical Class	Sub 50V	Sub 50V	Sub 50V
Socket Options	Magnetic, tool free clip in.	Magnetic, tool free clip in.	Magnetic, tool free clip in.
Supply Voltage	48V DC	48V DC	48V DC
Surge Protection	To be Installed at power supply	To be installed at power supply	To be installed at power supply
Power Factor	Dependent on power supply.	Dependent on power supply.	Dependent on power supply.
<u>Optical Information</u>			
CRI	Better than 0,94	Better than 0,94	Better than 0,94.
CCT	Either 3K or 4K or 5K (Not selectable)	Selectable on light fixture; 3K or 4K or 6K	Selectable on light fixture 3K or 4K or 6K
Beam angles	15° , 24° , 38° , 60° (Fixed. Not selectable)	15° , 24° , 38° , 60° (Selectable on Light Fixture)	120°
<u>Performance</u>			
Total Circuit load and Lumens	30W, 2400 lumens exiting the light	15W, 1200 lumens exiting the light	20 Watts and 1600 lumens exiting the light.
<u>Operating Conditions</u>			
Operating Temperature range	-20°C to +40°C	-20°C to +40°C	-20°C to +40°C
<u>Dimensions and Mounting</u>			
Weight	1kg	0.9kg	0.3kg




FACT FILE:


Fixed Spot Front View(30W):

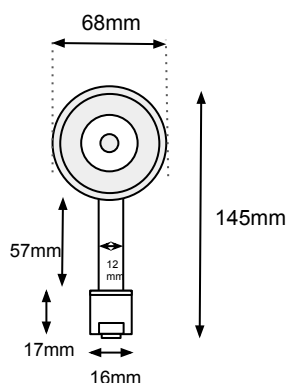


Fixed Spot Side View(30W):

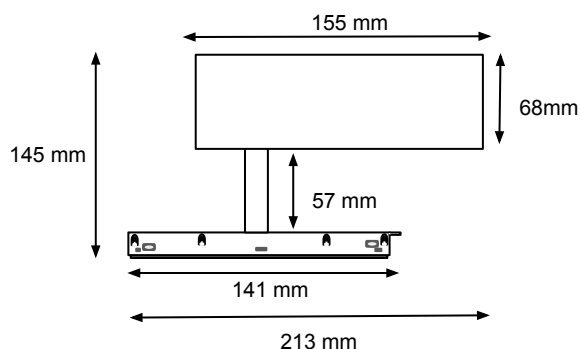


Variable Spot Front View (15W)

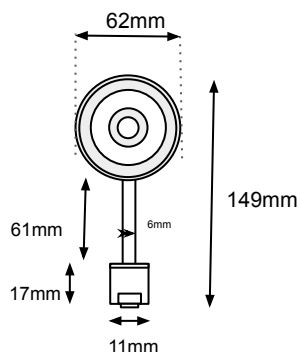


Variable Spot Side View (15W)

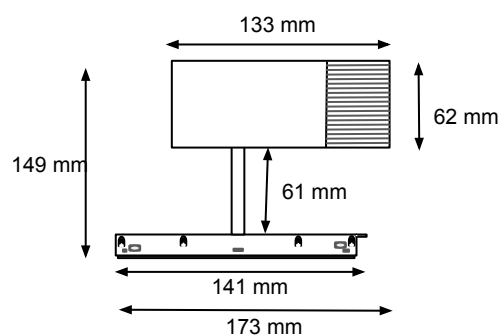


Ambient Light Front View: (20W)

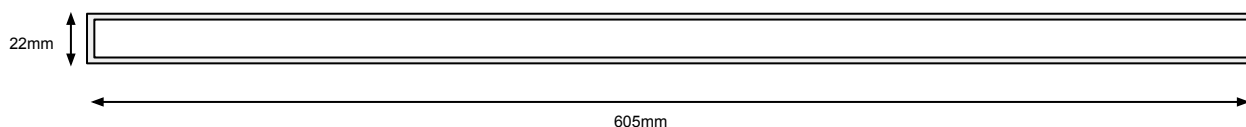


Ambient Light Side View: (20W)

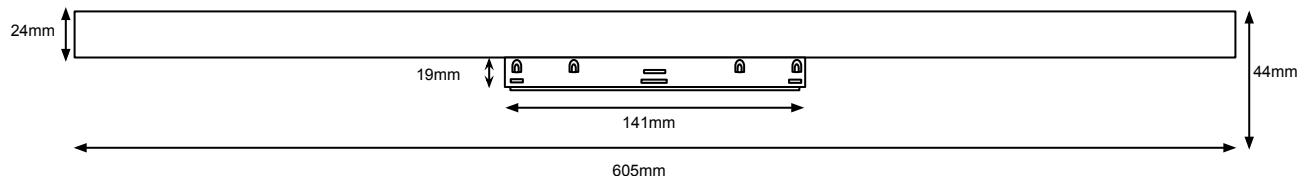


Fixed Spot On Track

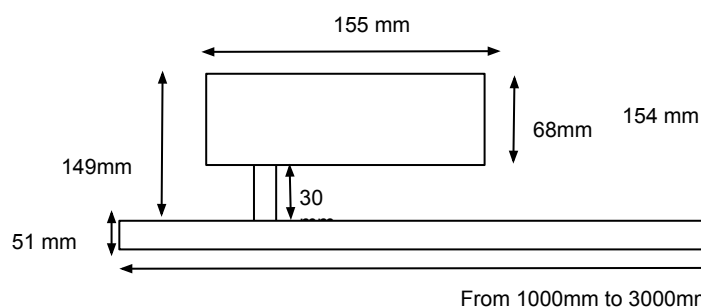


Variable Spot On Track

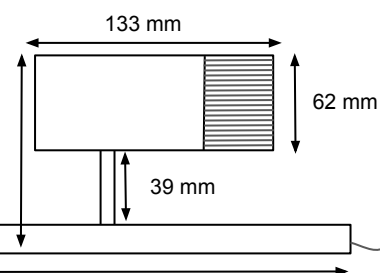


From 1000mm to 3000mm




FACT FILE:

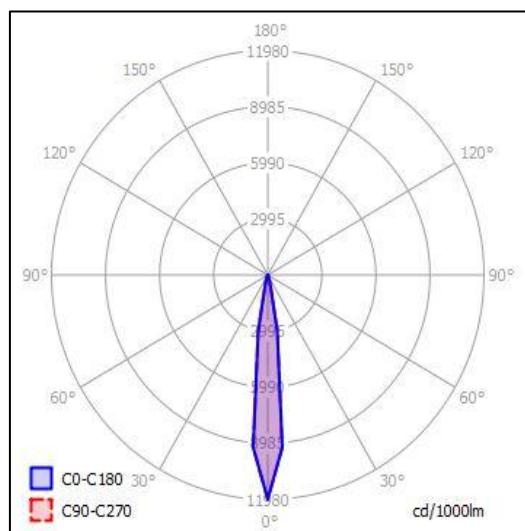


Variable Spot 15W 15°

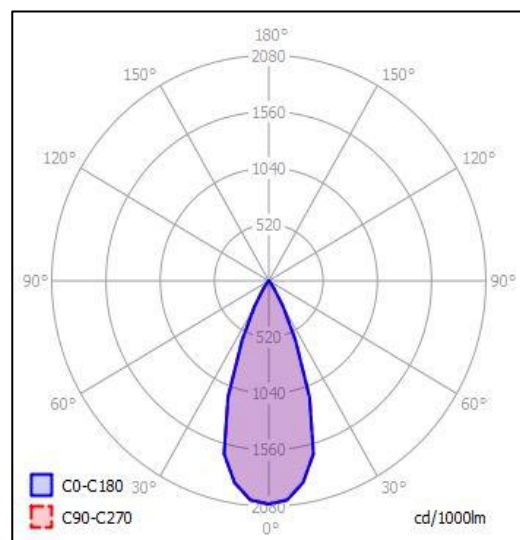


Variable Spot 15W 38°

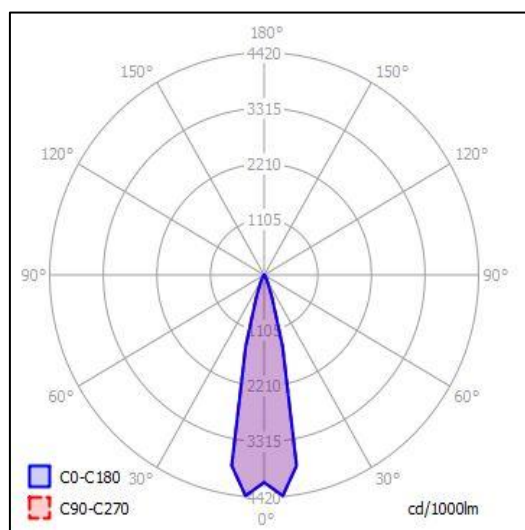


Variable Spot 15W 24°

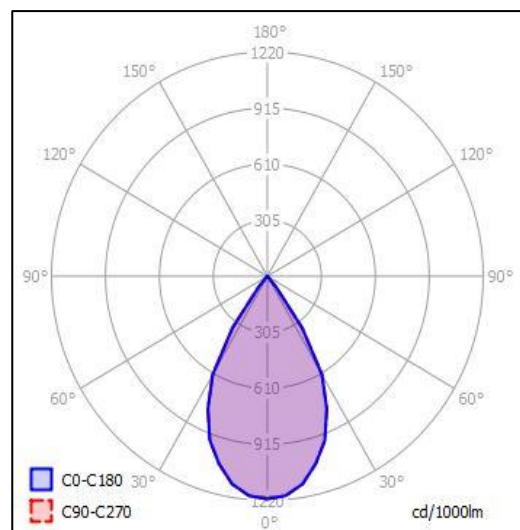

Variable Spot 15W 60°

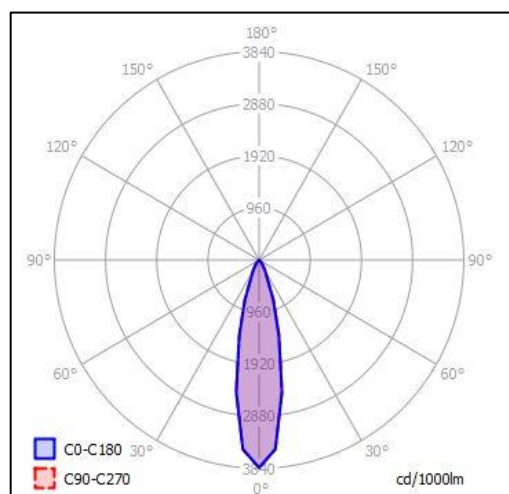

Fixed spot 30W 24°

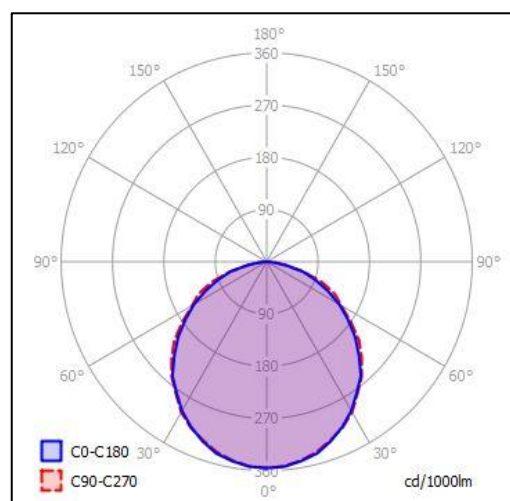

Ambient Light