



Micro In-Ground Up Light

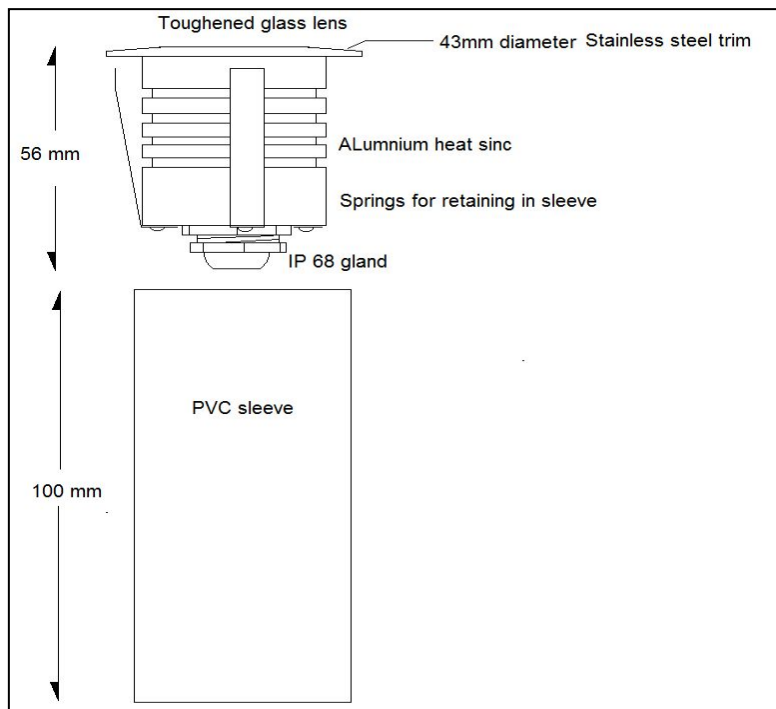



FACT FILE:

<u>General Information</u>	
Body Construction	Trim – Stainless steel grade 316 (marine) Body – aluminium
Lens Type	Glass lens 8 mm thick
Sleeve	PVC - monoled
Recommended Installation	For mounting into the ground.
Compliance	SANS 60598
IP Rating	IP 68
Control Type	Normally on or off - DALI or DMX on request
<u>Electrical Information</u>	
Electrical Class	Class s
Socket Options	NA
Supply Voltage	350mA 2,5 – 3,2V – constant current driver must be used.
Surge Protection	None
Power Factor	Better than 0,94
<u>Optical Information</u>	
CRI	Better than 84 – over 94 on request
CCT	3000K or 4000K or 5000K or red or green or blue or amber
<u>Performance</u>	
Total Circuit load and Lumens	Single 3535 1,2W LED – white -130 lumens for 4000K or 5000K Reduce by 8% if using 3000K. Available in red or green or blue or amber. 1.2W (not counting power supply)
Beam Distribution	Available in: Narrow Medium Wide
<u>Operating Conditions</u>	
Operating Temperature range	-20C to +45C
<u>Dimensions and Mounting</u>	
Weight	Below 100g
NOTES:	This product can be driven over once installed