



Emergency Exit Sign




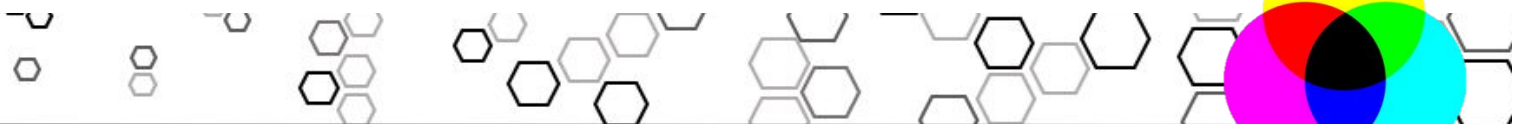

FACT FILE:



<u>General Information</u>	
Body Construction	Extruded aluminium - powder coated
Lens Type	Moulded Acrylic
Recommended Height Installation	2.4m to 5m
Compliance	SANS 60598
IP Rating	IP 20
Control Type	Maintained – with two power feeds – one for switching and one for unswitched. Non Maintained – single power feed – unswitched. If the power fails the emergency circuit is activated – providing 480 lumens for a minimum of three hours – typically five hours
Battery type	Lithium Ion
Motifs	All types available – self adhesive vinyl
<u>Electrical Information</u>	
Electrical Class	Class 1
Socket Options	N/A
Supply Voltage	230V AC 50HZ
Surge Protection	Dependent on internal power supply
Power Factor	Better than 0.94
<u>Optical Information</u>	
CRI	+85
CCT	3000k, 4000, 5000k
<u>Performance</u>	
Total Circuit load and Lumens	12W
<u>Operating Conditions</u>	
Operating Temperature range	-20°C to +45°C
<u>Dimensions and Mounting</u>	
Weight	2kg
Mounting options	As per drawing – pendant or wall mounted or ceiling mounted.



FACT FILE:

