





Ecolite Round LED recessed Downlight family

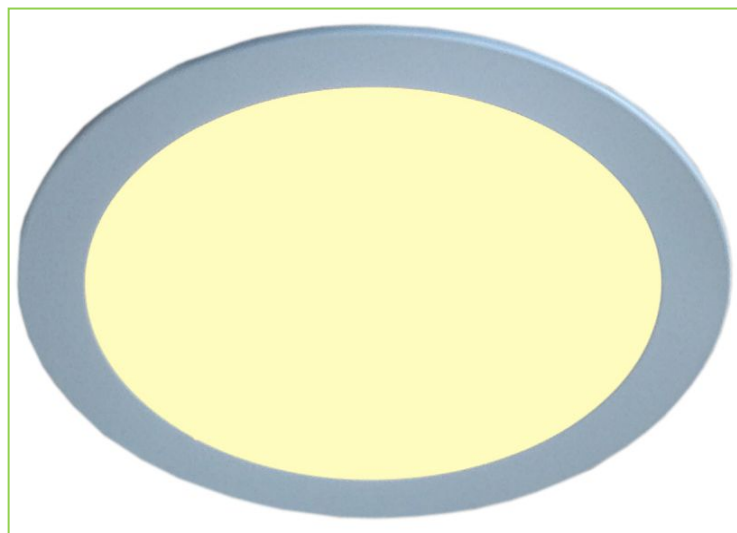

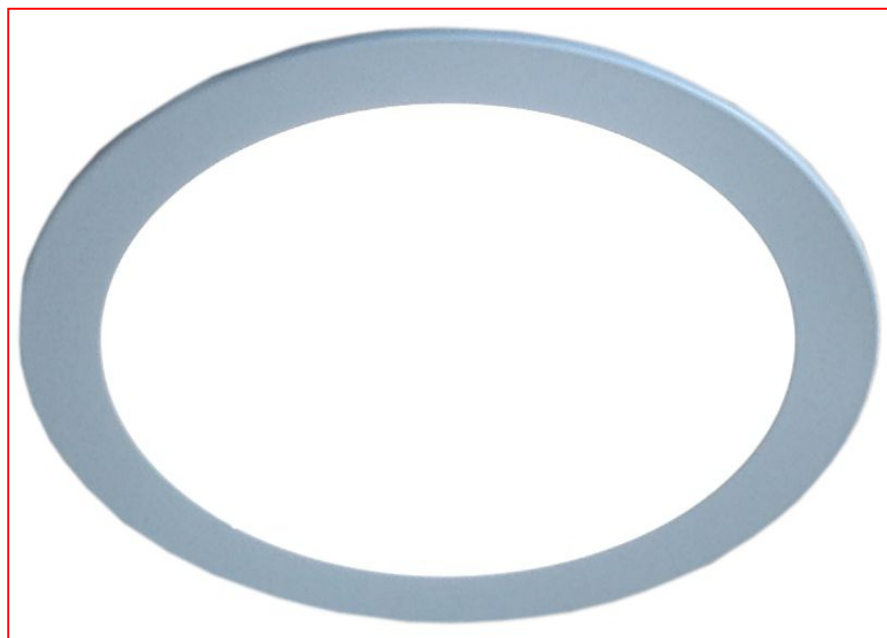


FACT FILE:





	<u>7W</u>	<u>17W</u>	<u>24W</u>
<u>General Information</u>			
Body Construction	ABS with aluminium heat sink	ABS with aluminium heat sink	ABS with aluminium heat sink
Lens Type	Opal Acrylic	Opal Acrylic	Opal Acrylic
Recommended Height Installation	From 2,4m to 5m	From 2,4m to 5m	From 2,4m to 5m
Compliance	SANS 60598	SANS 60598	SANS 60598
IP Rating	IP 44	IP 44	IP 44
Control Type	Standard on or off DALI optional DMX optional	Standard on or off DALI optional DMX optional	Standard on or off DALI optional DMX optional
<u>Electrical Information</u>			
Electrical Class	Class 2	Class 2	Class 2
Socket Options	Supplied with 3m cabtyre and 5A plugtop	Supplied with 3m cabtyre and 5A plugtop	Supplied with 3m cabtyre and 5A plugtop
Supply Voltage	230V AC 50HZ	230V AC 50HZ	230V AC 50HZ
Surge Protection	1KV in Power supply	1KV in Power supply	1KV in Power supply
Power Factor	Better than 0,95	Better than 0,95	Better than 0.95
<u>Optical Information</u>			
CRI	Always better than 84 +94 on request	Always better than 84 +94 on request	Always better than 84 +94 on request
CCT	Standard is either 3000K or 4000K or 5000K – others on request	Standard is either 3000K or 4000K or 5000K – others on request	Standard is either 3000K or 4000K or 5000K – others on request
<u>Performance</u>			
Total Circuit load and Lumens	896 Lumens	2176 Lumens	3072 Lumens
<u>Operating Conditions</u>			
Operating Temperature range	-20C to +45C	-20C to +45C	-20C to +45C
<u>Dimensions and Mounting</u>			
Weight	Below 200g	Below 250g	Below 300g
Data	IES files - Yes	IES files - Yes	IES files - Yes

Lumen values are as measured at source - on the PCB - not exiting light fitting. Due to the fast pace of development - values are subject to change at any time and without notice.



FACT FILE:

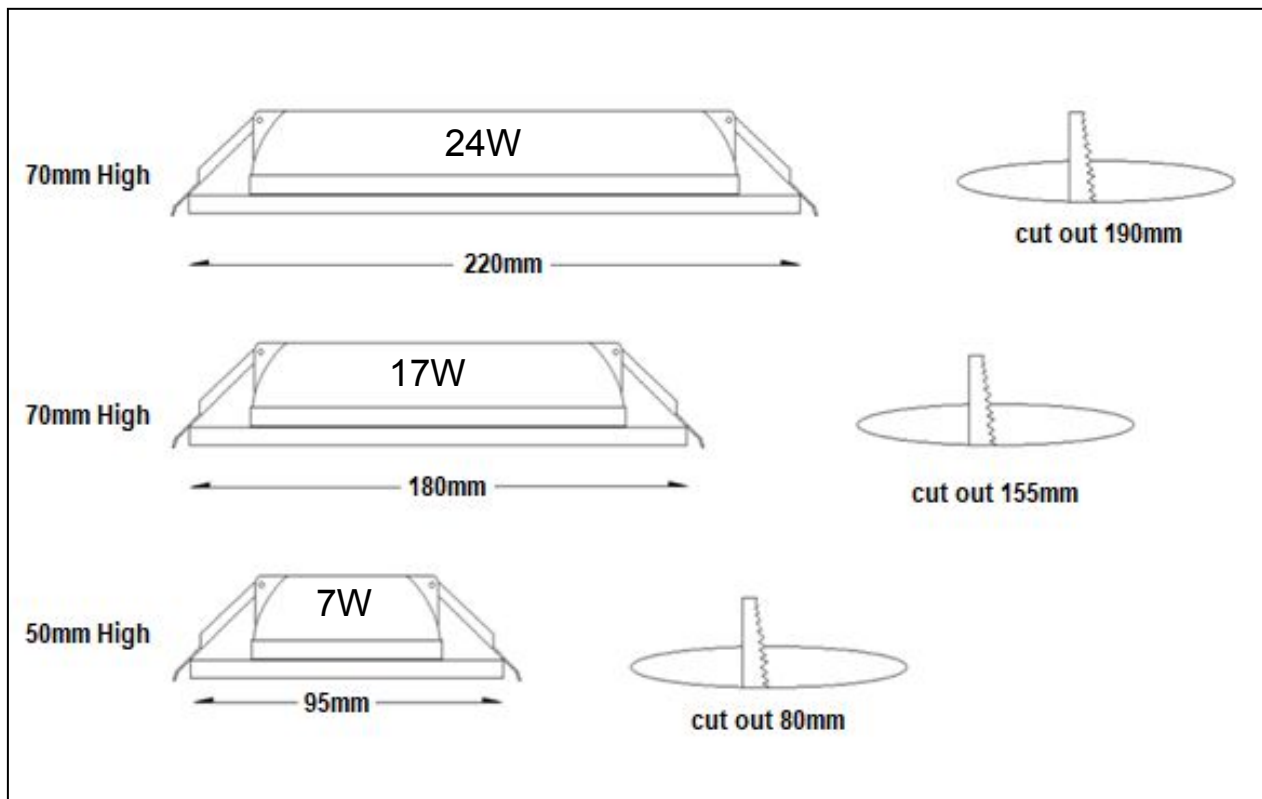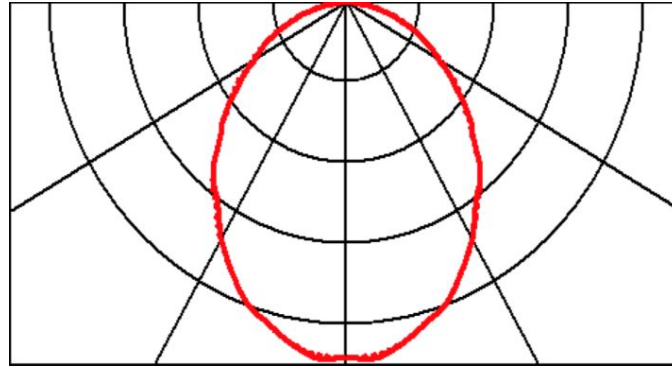

Lumen values are as measured at source - on the PCB - not exiting light fitting. Due to the fast pace of development - values are subject to change at any time and without notice.