



## Ribbon LED in Channel with Optional Diffuser




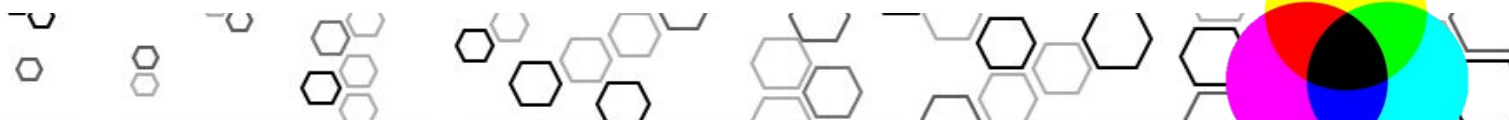


## FACT FILE:



	<u>Single Colour</u>	<u>RGBW Colour Mixing</u>
<b><u>General Information</u></b>		
<b>Body Construction</b>	Aluminium powder coated Or anodised	Aluminium powder coated Or anodised
<b>Lens Type (Cover lens - Optional)</b>	Acrylic - satin	Acrylic - satin
<b>LED Type</b>	Led strip light – 12mm wide maximum	LED strip light – 13mm wide maximum
<b>Recommended Height Installation</b>	NA	NA
<b>Compliance</b>	SANS 60598	SANS 60598
<b>IP Rating</b>	With lens and silicone sleeve IP 65	With lens and silicone sleeve IP 65
<b>Control Type</b>	On or Off – or DALI or DMX or 1-10V	On or Off – or DALI or DMX or 1-10V
<b><u>Electrical Information</u></b>		
<b>Electrical Class</b>	Class 2	Class 2
<b>Socket Options</b>	N/A	N/A
<b>Supply Voltage</b>	24V DC	24V DC
<b>Surge Protection</b>	Dependent on external power supply	Dependent on external power supply
<b>Power Factor</b>	+0.85	+0.85
<b><u>Optical Information</u></b>		
<b>CRI</b>	White - +90 Colours – N/A	N/A
<b>CCT</b>	<input type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> 5000K <input type="checkbox"/> Amber, Red, Green, Blue	RGBW
<b><u>Performance</u></b>		
<b>Total Circuit load and Lumens (Per meter)</b>	<input type="checkbox"/> Neutral white- 600lumen <input type="checkbox"/> Warm white - 400 lumen <input type="checkbox"/> 5W	7.5W
<b><u>Operating Conditions</u></b>		
<b>Operating Temperature range</b>	-20C to +45C	-20C to +45C
<b><u>Dimensions and Mounting</u></b>		
<b>Weight</b>	400g/m	400g/m
<b>Installation Data</b>	Available	Available



## FACT FILE:

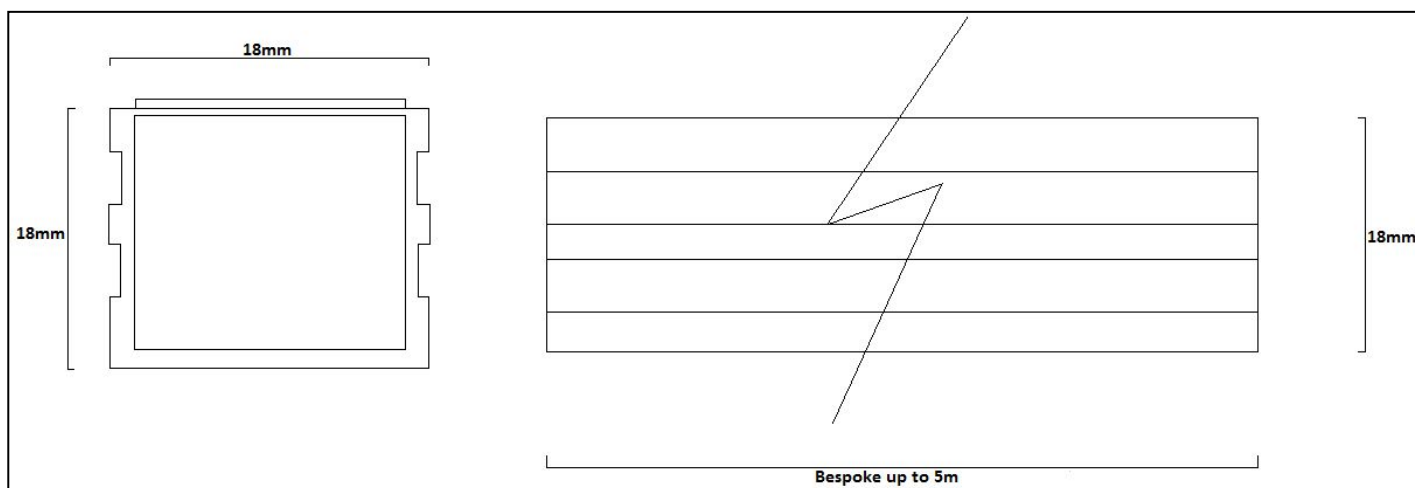

Lumen values are as measured at source - on the PCB - not exiting light fitting. Due to the fast pace of development - values are subject to change at any time and without notice.